



IMI PBM

## Diverter Port Ball Valves

### DI & DP Series 1, 1/2" thru 4", Series 4, 3" & 4"

## Installation, Operation and Maintenance Instructions

#### General:

This Installation, Operation, and Maintenance manual is for the safe use of PBM 3-piece, Adjust-O-Seal®, DI and DP Series 1 ball valves. Please read the instructions carefully and save them for future reference.

#### Installation:

Fasteners are designed to prevent loosening under normal operating conditions. Prior to commissioning at final point of operation, all valves should be inspected to ensure fasteners are tightened to manufacturer's Recommendations and no damage has occurred during transit or handling. DI and DP Series 1 valves may be installed in any direction as required by the flow pattern. During the installation, the valve should be in either the fully counter clockwise position or the fully clockwise position. Unless equipped with socket weld end fittings, DI and DP valves need not be disassembled prior to installation.

#### Operation:

For manual valves, operation consists of turning the handle either the fully clockwise, fully counter clockwise, or a 90 degree increment between (as noted by handle location). These valves may also be automated with actuators and other valve automation equipment. Mechanical handle stops must be removed if manual valves are converted to automated valves. For automated valves, operation is controlled by the actuator placed on top of the valve. Valve stops are an integral part of the actuators. Good operating procedure requires periodic inspection of the valves and replacement of parts as required. Always use PBM factory authorized replacement parts.

Follow instructions to ensure optimum performance:

#### Adjusting for Normal Wear:

Note: Valve to be fully in one position of flow pattern, prior to adjustments.

1. IMI PBM Ball Valves are designed with the Adjust-O-Seal® feature. If the valve shows signs of leakage due to normal seat wear, tighten the end fitting fasteners evenly, in the staggered sequence as shown at bottom of Page 4, until the leakage stops and the valve operates smoothly:
  - a) Initially, there should be a space between end fittings and the body. This space is the key to the Adjust-O-Seal® feature and allows in-line adjustment of the seats and gasket.
  - b) End fitting fasteners should be tightened only until valve stem breakaway torque is reached (Torque Table - Page 4).
2. If valve shows signs of leakage in stem area due to normal stem packing wear, perform the following:
  - a) For valves 4" and smaller, tighten the locking jam nut on the stem to fully compress the spring washers, then back off the nut 1/8 turn. Leakage should fully stop, and the valve should continue to operate smoothly.
3. After adjustments have been made to seats, or if packing leakage cannot be stopped, a repair kit will be required.




#### WARNING

For your safety and protection it is important that the following precautions be taken prior to working on the valve.

1. Depressurize and drain the line.
2. Cycle the valve to relieve any pressure trapped in the valve.
3. Disconnect any air and electrical connections to the valve assembly.
4. Know what the media is in the line and wear appropriate protective clothing and equipment. Obtain appropriate MSDS sheets.
5. To ensure safe product selection and operation, it is the responsibility of the process system designer and end user to determine the appropriate compatible materials of construction and adequate product ratings for the process system. Process system designer, installer, and end user are responsible for proper installation, operation, and maintenance.
6. When disposing of Teflon parts, do not incinerate or subject to open flames.

## Process Automation

Parts List	
Item	Description
1	Stem Nut
2	Handle
3	Follower
4	Grounding (If Any)
5	Lock-Washers
6	Body Hex Nuts
7	Stop Disc (Manual Only)
8	Spring Washers
9	Stem Packings
10	Stem
11	Grounding Spring (If Any)
12	End Fittings
13	Body Bolts
14	Body Gaskets
15	Seats
16	Cavity Filler (If Any)
17	Ball
18	Body
19	Stop Pin (Manual Only)

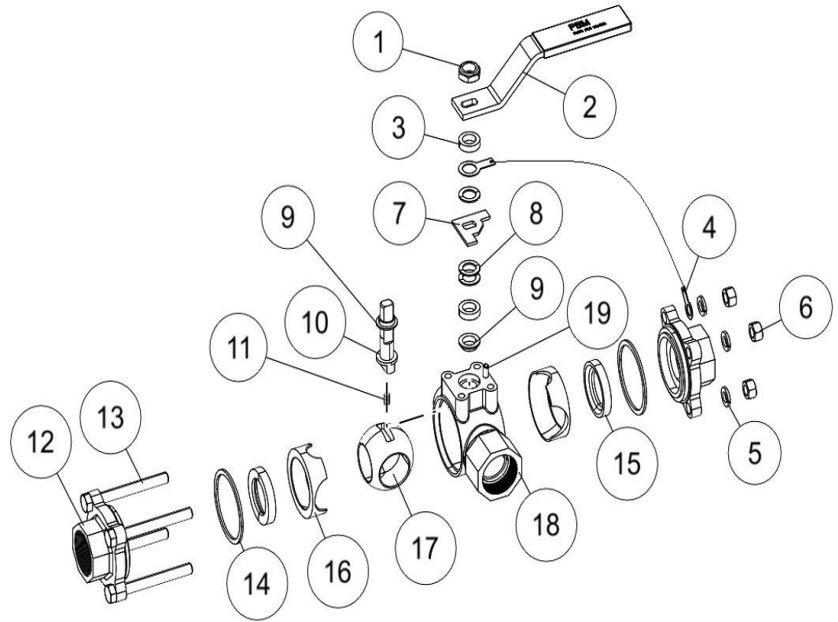

### Disassembly of Valve:

1. Isolate and depressurize the associated piping system. Cycle the valve to ensure there is no trapped pressure or fluid in the valve cavity. The valve should be left fully open or fully closed.
2. **For Automated Valves Only:** Remove all air and electrical power from the actuator, solenoid valve, and switchbox, if any. Then remove the automation assembly from the valve. Retain coupling and mounting bracket.
3. **For Manual Valves Only:** Loosen and remove the upper jam nut from the stem and then remove the handle.
4. Loosen and remove the hex nuts and lock washers from the fasteners. Remove the fasteners. Pull the end fitting(s) free from the body. Remove the body subassembly.
5. Remove the seat, gaskets, O-Rings, if any, and cavity fillers, if any.
6. Rotate the stem to orient the ball to the closed position. Slide the ball out, taking care not to nick or scratch the ball.
7. Remove the internal ground spring, if any, from under stem.
8. Remove the follower, any spring washers, stop disc, and grounding, if any. For valves with gear operators, remove the gear operator, bracket, and coupling.
9. Push the stem into the body and out an open end of the body.
10. Remove the packings from the body and the stem.

### Reassembly of Valve:


1. Before reassembling the valve, examine the parts and repair or replace damaged or worn parts. Clean metal parts, as necessary, using a solvent compatible with the process fluid and a non-abrasive cloth. PBM recommends using new seats, body gaskets, and seals at each assembly.
2. Install a new bottom packing onto the threaded end of the stem and slide it down with the flanged surface touching the shoulder.
3. Insert the stem into body bore and through the stem bore in the body. Install the new top packing onto the stem with the flanged surface facing upwards. Push the packing into the body counterbore.
4. Install the follower onto the stem, until the follower is resting on the upper packing.
5. Lubricate the stem threads with an anti-galling lubricant.
6. For Manual 1" and smaller valves:
  - a) Install a spring washer, concave side facing upward, on the follower.
  - b) Install a second spring washer, concave side facing downward. Install a third spring washer, concave side facing upward. Ensure that the spring washers on the stem are in an alternating or series arrangement. No two adjacent spring washers should be facing the same direction or in a parallel arrangement.
  - c) Install the external ground wire, if any, between any two spring washers.
  - d) Install a second follower on top of the spring washers. Install the handle (with stops) on top of the follower such that the handle is over the stop pin when the valve is in the open position.
  - e) Thread the jam nut onto the stem and tighten to fully compress the spring washers, then back off the nut 1/8 turn.

7. For Manual 1-1/2" and larger valves:
  - a) Install a spring washer, concave side facing upward, on the follower. Install the stop disc such that the valve rotates 90° clockwise to open the valve.
  - b) Install two more spring washers, alternating direction, starting concave side facing downward. If an external ground wire is used, install between any two spring washers. Ensure that the spring washers on the stem are in an alternating or series arrangement. No two adjacent spring washers should be facing the same direction or in a parallel arrangement.
  - c) Install a second follower on top of the spring washers. Install the handle on top of the follower such that the handle is over the stop pin when the valve is in the open position.
  - d) Thread the jam nut onto the stem and tighten to fully compress the spring washers, then back off the nut 1/8 turn.
8. For Automated or Prepared for automation valves:
  - a) For 1" and smaller valves, with a handle (03 option) and all valves that will be actuated (02 option), install a spring washer, concave side facing upward, on the follower.
  - b) For valves 1-1/2" and larger with a handle (03 option), install one spring washer, concave side facing upward, on the follower. Install the stop disc on top of the spring washer such that 90° clockwise stem rotation opens the valve.
  - c) Install a second spring washer onto the stem with the concave side facing downward. Install the remaining spring washers onto the stem in an alternating or series arrangement. No two adjacent spring washers should be facing the same direction or in a parallel arrangement.
  - d) For valves with a handle (03 option), install the handle on top of the spring washer such that the handle is over the stop pin when in the open position.
  - e) For 4" and smaller valves, tighten the locking jam nut on the stem to fully compress the spring washers, then back off the nut 1/8 turn.
9. Install a spring washer onto the stem with the concave side facing upward. Install the external ground wire terminal onto the stem, if applicable, such that the ground wire extends towards the end fitting side of the body
10. Install a second spring washer onto the stem with the concave side facing downward. Install the remaining spring washers onto the stem in an alternating or series arrangement. No two adjacent spring washers should be facing the same direction or in a parallel arrangement
11. Rotate the stem to the closed position of the valve. Insert the internal ground spring, if any, into the hole at the bottom of the stem.
12. Orient the ball, such that the stem slot runs parallel to the body bore and insert the ball into the body. Slide the stem tang into the ball slot, being careful not to nick or scratch the ball. Rotate the stem until the ball is in the open position.
13. Install the cavity fillers, if any, into the body.
14. Install the new seats, gaskets, and O-rings, if any, in their mating cavities in the end fittings. Lubricate O-rings with a lubricant compatible with the process fluid. Insert the end fittings in the body bores, making sure the seats, gaskets, and O-rings remain in position.
15. Lubricate external threads of body bolting with anti-galling lubricant.
16. Install fasteners, tagging, and lock washers then install and hand-tighten hex nuts. The external ground wire connected to the stem should have its terminal installed underneath one of the closest nuts and lock washers, if applicable. If the valve is electrically grounded, install the external ground spring around the bolt that passes through the swing out ring.
 

Wrench-tighten the bolting or hex nuts according to the procedure shown at the bottom of Page 4, while maintaining an even gap between the body and end fittings, and until the stem torque, as shown in the torque table on Page 4 is reached. The torque is the measured stem torque as the valve leaves the closed position. Cycle the valve to verify freedom of operation and torque. If practical, check the valve seats and seals for leaks.
18. For valves with gear operators, reinstall the bracket, coupling, and gear operator.
19. For Automated Valves Only: Reinstall the automation assembly with the bracket and coupling. Then reconnect air and electrical power.
20. Insulate the valve, if applicable.

**Tightening Procedure for End Fittings:**

1. Hand tighten fasteners.
2. Wrench tighten each fastener in increments per the staggered sequence illustrated at right until the spring washers begin to compress.
3. Continue tightening bolts or hex nuts 1/8 turn until the recommended torque value is achieved when measuring at the valve stem.

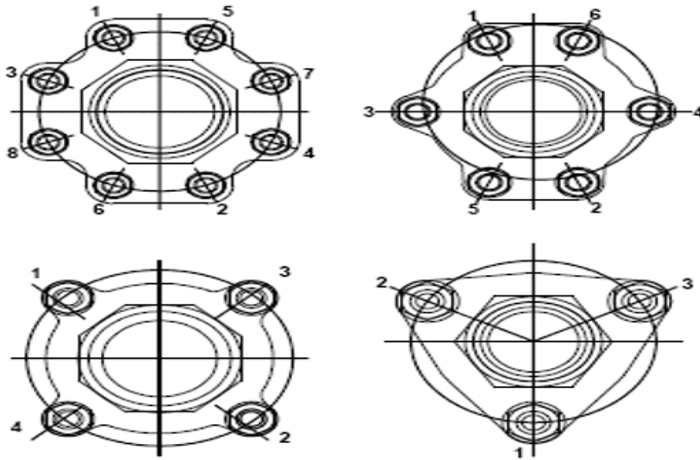

Replacement Kits and Parts					
Valve Size	DP Repair Kit (RTFE)	DP Cavity Filler Kit (VTFE)	L-Port DP Ball (316L S/S)	Stem (316L S/S)	Spring Washers)
1/2"	SPRTC1 - - A - - 1	DPVTC1 - - D - - 3	DPH-C102A-	SPHLC105	SPK-E110
3/4"	SPRTD1 - - A - - 1	DPVTD1 - - D - - 3	DPH-D102A-	SPHLC105	SPK-E110
1"	SPRTE1 - - A - - 1	DPVTE1 - - D - - 3	DPH-E102A-	SPHLE105	SPK-E110
1 - 1/2"	SPRTG1 - - A - - 1	DPVTG1 - - D - - 3	DPHLG102A-	SPHLH105	SPK-H110
2"	SPRTH1 - - A - - 1	DPVTH1 - - D - - 3	DPHLH102A-	SPHLH105	SPK-H110
3"	SPRTK1 - - A - - 1	DPVTK1 - - D - - 3	DPH-K102A-	SPHLK105	SPK-K110
4"	SPRTL1 - - A - - 1	DPVTL1 - - D - - 3	DPH-L102A-	SPHLK105	SPK-K110

**Note for Table Above:**

1. For DI repair kits, change DP repair kits to use VTFE – example SPVTC1–A–1.
2. For cavity filler kits above, insert flow pattern of valve between D - - 3, example: DPVTC1 - - D103.
3. Standard repair kits include 2 RTFE seats, 2 RTFE body gaskets, 2 RTFE stem packings
4. Cavity filler kits include 2 VTFE fillers.
5. Standard repair kits and replacement parts are RTFE OR VTFE.
6. For 3" and 4" Series 4 balls, change the 102 at the end to 402. For Series 4 repair kits, change the first 1 to a 4.
7. Replacement parts are one each per part number.
8. For materials other than RTFE, substitute the correct material ID and code.
9. For valves with grounding, add "G" to the end of the stem part number.

**Material Definitions:**

TF	V-TEF™	Chemically modified polytetrafluoroethylene
HT	S-TEF®	Stainless steel reinforced polytetrafluoroethylene
RT	RTFE	Glass reinforced Polytetrafluoroethylene
VT	VTFE	Virgin Polytetrafluoroethylene
PK	PEEK™	Polyetheretherketone
UT	UHMWPE	Ultra High Molecular Weight Polyethylene
KY	KYNAR	Polyvinylidene Fluoride

**Note for Table at Right:**

1. Stem torques are shown in nominal values and represent ideal conditions. (100 psig / 6.9 bar or less, ambient temperature, with fluid free of suspended solids and comparable in viscosity to water).
2. For UHMWPE seats, multiply by 1.25. For S-TEF® or Kynar seats, multiply by 1.56. Consult factory for PEEK seat torques.
3. Torque values measured at the stem, NOT at the fasteners.

Valve Size	Size Code	Valve Stem Nominal Breakaway Torque - V-TEF™ Seats	
		in - lbs	N-m
1/2"	C1	48	5.4
3/4"	D1	60	6.8
1"	E1	72	8.1
1-1/2"	G1	168	19.0
2"	H1	192	21.7
3"	K1	420	47.5
4"	L1	540	61.0